# MOLF

#### **SRT304**



## **FEATURES**

Maintain control with four dual-stacked burners that go from 20,000 Btu down to a mere breath of flame

Simmer and melt sauces, soups, and marinades easily with the lower tier of the dual-stacked burner

Reignites flame automatically with spark ignition system

Move pots and pans effortlessly across the continuous cast-iron grates

Cleanup is a snap as sealed, seamless burner pans contain sloshes and spills

Match other Sub-Zero, Wolf, and Cove products with heavy-gauge stainless steel and signature red infinite control knobs

## **ACCESSORIES**

2-Burner Wok Grate

2-Burner Wok Grate

30" Brass Bezels

30" Chrome Bezels

Filler Trim

High altitude conversion kits available

 $5\mbox{"}$  and  $10\mbox{"}$  stainless steel risers, and  $20\mbox{"}$  riser with shelf

Red, black, brushed stainless knob kits

Accessories available through an authorized dealer. For local dealer information, visit <a href="mailto:subzero-wolf.com/locator">subzero-wolf.com/locator</a>.




#### **KNOB OPTIONS**







## **TOP CONFIGURATION**



## **RANGETOP SPECIFICATIONS**

- Stainless-steel island trim (included)
- · Stainless-steel bezels
- 1 9,200 Btu burner
- 1 15,000 Btu burner
- 1 18,000 Btu burner
- 1 20,000 Btu burner




#### PRODUCT SPECIFICATIONS

Model	SRT304
Dimensions	29 7/8"W x 8 1/2"H x 28 1/2"D
Weight	132 lbs
Electrical Supply	120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type


## **ELECTRICAL**

## **GAS**




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

## **DIMENSIONS**

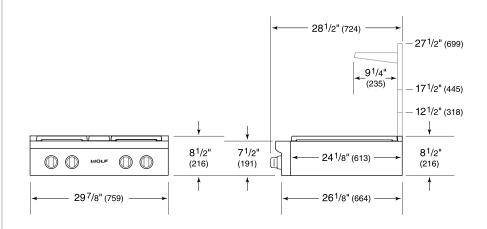

#### STANDARD INSTALLATION

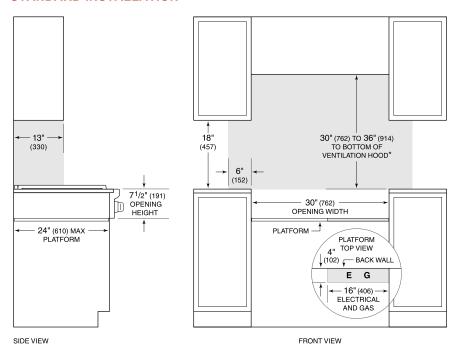

\*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

Electrical and gas supply located through bottom of platform.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.